


XPS FOAM UNDERLAY PANELS



FITTING INSTRUCTIONS:

- Suitable for use under laminate and wood flooring as a floating floor system.
- Underlay panels can be cut using a sharp craft knife.
- Panels should be laid in a brick bond fashion.
- Not recommended for use under tiles.

Thermal Conductivity	0.033 W/mK
Fire Performance	Class E : EN 13501-1
Compressive	300kPa
Service Temp. Limit	-50°C + 75°C

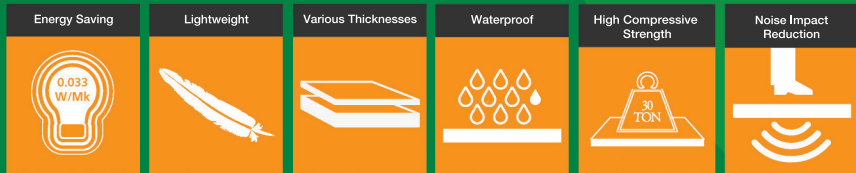

Polyfab Coatings & Systems Ltd. Off Hemfield Court,
Makerfield Way, Ince, Wigan, Lancashire. WN2 2PR

Tel: 0844 335 1136 **Email:** sales@pcsboard.com **Web:** www.pcsboard.com