



## Siena

### Digital electric D.H.W. unvented heater









4 pre-installed programs (Common, split shift, home life and office)



Interactive visual menu with icons



Compatible with Air Control remote (not included)



TECHNICAL INFORMATION

Energy Classification

5 years guarantee on the tank + 2 years on all other parts

IP24

С

(when you register your product)




Ceramic heating element	~
Enameled steel tank	~
Magnesium anode protector	~
CFC-free polyurethane insulation foam	~
Touch control panel in PC/ABS	~
Infrared communication	<b>✓</b>
Maximum working pressure (bars)	8

FUNCTIONS	
Anti-frost / Comfort / ECO / User mode	~
4 pre-installed programs	<b>✓</b>
Manual / Automatic function	<b>✓</b>
TFT screen with interactive visual menu	<b>✓</b>
Anti-legionella function	<b>✓</b>
Temperature evolution function	<b>✓</b>
24/7 programming	~
INSTALLATION	
Support tripod (optional)	<b>✓</b>
Installation position	Vertical
Safety valve	~
SAFETY	
Safety thermostat	~
Anti-legionella disinfection cycle	<b>✓</b>

REGULATIONS & GUARANTEES	
2004/108/CE Electromagnetic comp.	
2006/95/CE Low voltage directive	
Guarantee on the inner tank	5
Guarantee on all other parts	2

2 years





MODELS	SWI080DHW4	SWI150DHW4
Volume (L)	80	150
Load profile	М	XL
Nominal power (W)	2,400	2,400
DIMENSIONS		
Diameter x height (mm)	470 x 777	470 x 1,297
Installed depth (mm)	487	487
Distance between connections (mm)	100	100
CHARACTERISTICS		
Empty weight (kg)	25.2	38.5
Water connections (inches)	1/2"	1/2"
Finishes	White RAL 9016 (tank)    Black RAL 9005 (control panel)	
EAN CODE	8436045913555	8436045913135



### Installation kit

for Rome & Siena D.H.W. unvented heaters

It is **mandatory** for all models of unvented domestic hot water heaters to be installed with an installation kit. This kit is composed of:

### CE V

#### COMPATIBILITY

Compatible with Rome & Siena

#### **REGULATIONS & GUARANTEES**

Guarantee 2 years



Pressure reducing & relief valve




Tundish



Expansion vessel

MODELS	KITW02	
Compatible with	80 - 150 L	
CHARACTERISTICS		
Expansion vessel	12 litres (0.1 Mpa)	
Tundish	15 - 25 mm	
Pressure reducing valve	0.35 Mpa	
Relief valve	0.60 Mpa	
EAN CODE	8436045914347	

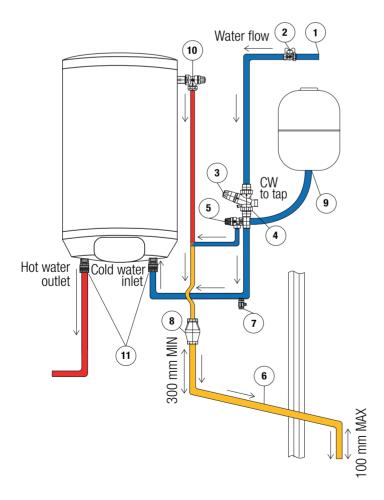



#### DETAILS OF THE INSTALLATION

- 1 Mains cold water supply
- 2 Stop cock (not supplied)
- 3 Pressure reducing valve (included)
- 4-5 Check valve Expansion relief valve (included)
- 6 Discharge pipe 22 mm
- 7 Drain cock (not supplied)
- 8 Tundish (included)
- 9 Expansion vessel (included)
- 10 T/P relief valve (included)
- 11 Electrolytic fittings (included)

<sup>\*</sup> This image is only for reference. Check the instruction manual or the Building Regulations (PART G) for specific details and accessories required to perform a proper installation. The Rointe water heaters must be installed by an installer with a valid Unvented Water Heaters Installer certification.




## Support tripod

( E 🏑

for D.H.W. unvented heater (Rome & Siena models)

TECHNICAL INFORMATION	
Material	Metal
REGULATIONS & GUARANTEES	
Guarantee	2 years



Its installation is highly recommended where wall fixing is not sufficient or cannot guarantee the stability of the heater due to the weight of the product when the tank is 100% full.

Installation of the support tripod does not mean it should not be mounted to the wall as explained in the product installation manual.



TPKW001
710
470
x 3
x 6
x 1
White RAL 9016
260
8436045914323

# Universal wall support



for D.H.W. unvented heater (Rome & Siena models)

This accessory allows you to take advantage of existing holes and plugs when replacing an old heater with the Rome and Siena D.H.W. unvented heater models, avoiding the need to drill the wall again. It allows easy and safe assembly / disassembly at the time of installation and maintenance interventions. Compatible with Rome and Siena D.H.W. heaters.

TECHNICAL INFORMATION	
Material	Metal
REGULATIONS & GUARANTEES	
Guarantee	2 years



MODEL	KWSPTI01
CHARACTERISTICS	
FInishes	White RAL 9016
DIMENSIONS	
Height (mm)	80
Width (mm)	470
EAN CODE	8436045910445

